


# CT SERIES

LASER CUTTING MACHINE

1.5kW-6kW



# THE BLACK GO CHESS

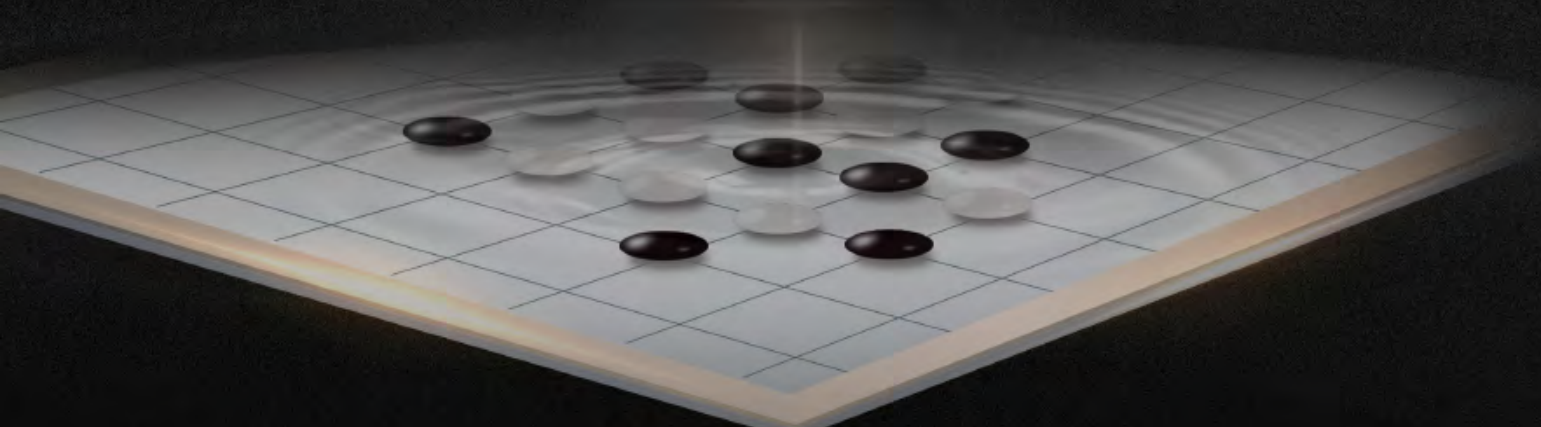

Black Go chess — inspired by Go

Circular — endless loop, endless exploration

Black — derived from obsidian crystal, steady and deep



# SELF-DEVELOPED CONTROL SYSTEM



## Advantages

- Bodor Laser independent research and development system, perfect combination with BodorGenius laser head, brings to customers upgraded cutting technology and efficiency.
- BodorThinker
  - Integration of CAD and CAM can directly identify drawings and nest
  - Good adaptability, support G code(NC)、DXF、PLT、ENG and other file formats
  - The newly added batch processin function, in conjunction with the processing data-base, makes it more convenient in batch cutting.
  - The updated CAM logic and more open CAM function make it more convenient to change drawings, use more comprehensively, and easier to cut.

# ONE-CLICK PROCESSING



## Advantages

---

- The machine can automatically exchange the workbench after processing, execute automatic edge seeking and cutting.
- Reduce the repetitive operation in batch cutting, reasonably distribute each function, realize human-machine cooperation, greatly improve the processing efficiency.

# INTELLIGENT ANTI-SHAKE OF SHEET EDGE



## Advantages

---

- Avoid the danger of cutting head stall caused by plate shake, keep continuous and high-effective cutting.
- Ensure continuous processing consistency of materials without repeated modification of processing drawings.
- Intelligent identification of various sheet specifications, improve the dynamic performance of the cutting head and quick response.

# ACTIVE OBSTACLE AVOIDANCE FUNCTION



## Advantages

---

- By optimizing the servo algorithm, predicting the obstacles and exerting the optimal performance of the motor can ensure the stability of the cutting process and the sensitivity and speed of the idle motion process;
- When an obstacle is detected, the Z axis responds at a very high speed and avoids obstacles.
- Avoid to interfering cutting caused by the tilted cutting piece and effectively solve the problem of collision of laser head during the thin plate cutting process.

# AUTOMATIC TUBE DETECTION



## Advantages

---

- Optimized edge searching method and algorithm guarantee higher cutting precision and better steadiness.

# ALL-ROUND PROTECTIVE COVERING



## Advantages

---

- The all-around protective covering isolates laser radiation and pollution, offering higher safety level.
- Smoke and dust produced during cutting will be automatically collected to ensure a clean operating area.



# PNEUMATIC CHUCK



## Advantages

---

- Quick clamping improves the work efficiency.
- The clamping force is large, stable and adjustable.
- Strong safety and reliability.

# DOUBLE FAST EXCHANGE TABLES




## Advantages

---

- Double fast exchange tables greatly improve efficiency
- Rack and gearwheel transmission system have better rigidity and higher accuracy, saving feeding time.

# MORTISE-AND-TENON TYPE PLATE WELDED SEGMENTED BED

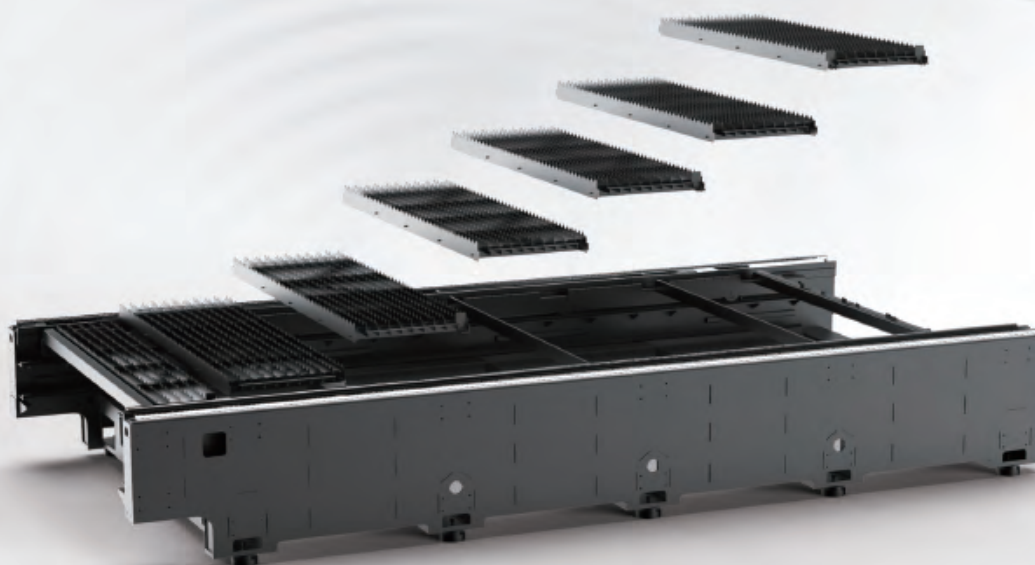

## Advantages

---

- Using Chinese traditional tenon-and-mortise structure to provide stronger bearing capacity.
- Solder joint fixing and structural bearing ensure long-standing operation stability.
- Welded structure improves shock absorption effect, lowering deviation caused by shock, offering more accurate cutting.
- Brand new modular platform solves deformation problem caused by heat and facilitates parts replacement.

# BODOR GENIUS



## Advantages

---

- The lightweight design ensures excellent acceleration performance and cutting speed.
- Excellent design in air flow and water-cooling structure enables the laser-head to continuously and efficiently operate at high power.
- Built-in drive unit, adjustment accuracy of 0.05mm.
- Collimation mirrors and focus mirrors are all using composite lenses, which can obtain the optimal optical quality and cutting effect.
- Distance detection device has no drift, ensures rapid reaction.



# BODOR CLOUD

## Advantages

---

- Daily equipment status management ( processing data, report forms )
- Alarm and maintenance reminder
- Cloud transmission for processing programs
- Remote online service access with one key
- Real-time information of the latest cutting process

Layout

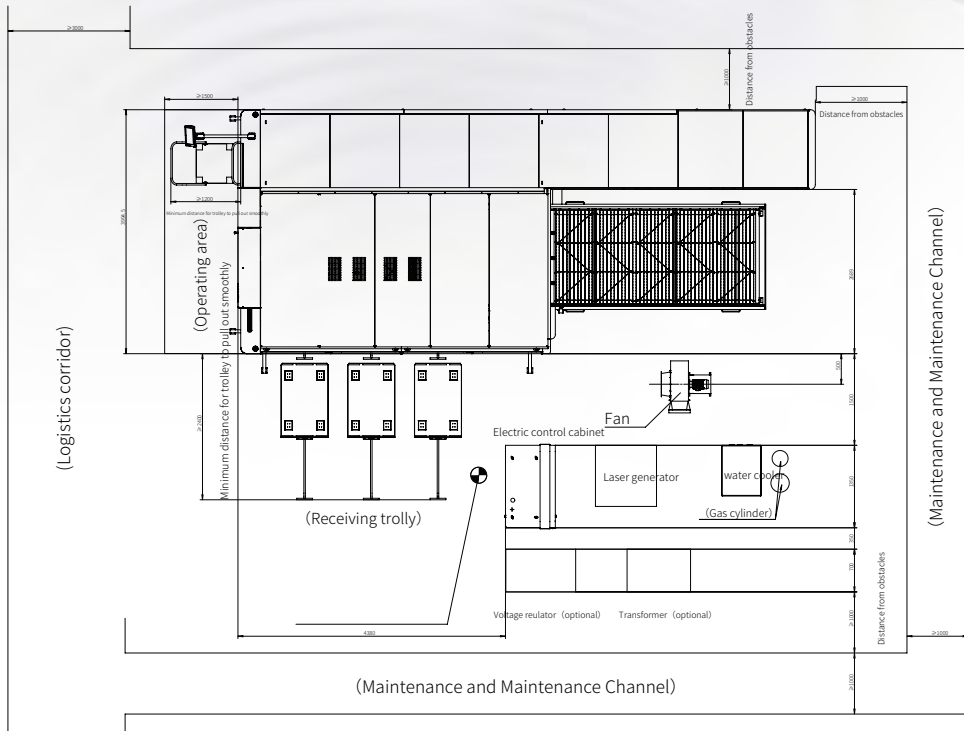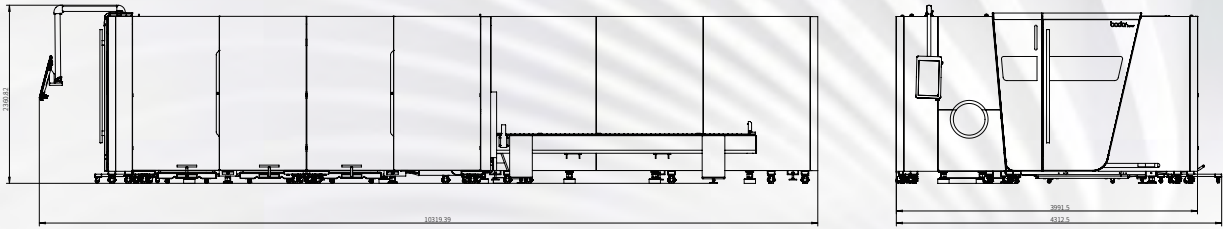

The above layout drawings and figures are for reference only, the actual drawing shipped with machine prevails.



**C3T 3048mm\*1524mm**

## Technical Data

| ITEM                                           | C3T                  |
|------------------------------------------------|----------------------|
| Working area                                   | 3048mm*1524mm        |
| Max. linkage speed                             | 100m/min             |
| Max. acceleration                              | 1.0G                 |
| Table load bearing                             | 900kg                |
| Machine overall dimensions                     | 9700mm*3600mm*2400mm |
| Overall weight                                 | 7800 kg              |
| Z axis travel                                  | 370mm                |
| Positioning accuracy                           | ±0.05mm              |
| Repositioning accuracy                         | ±0.03mm              |
| Total power capacity/current with 6KW source   | 59.9KVA/72.8A        |
| Total power capacity/current with 3KW source   | 44.1KVA/53.6A        |
| Total power capacity/current with 2KW source   | 35.4KVA/43A          |
| Total power capacity/current with 1.5KW source | 41.6KVA/50.6A        |

## Configuration And Components

|                                             |                                                   |
|---------------------------------------------|---------------------------------------------------|
| laser head                                  | Bodor Genius                                      |
| Laser source                                | Bodor Power                                       |
| Machine bed                                 | Mortise-and-tenon type plate welded segmented bed |
| X-axis、Y-axis、Z-axis Servo motor and driver | bodor                                             |
| Linear Rails                                | bodor                                             |
| Chuck drive types                           | pneumatic chuck                                   |
| Control system                              | Bodor Thinker                                     |
| Display size                                | 21.5 inches                                       |
| Door-open Protection"                       | ●                                                 |
| Intelligent Alarm                           | ●                                                 |
| Water Chiller                               | ●                                                 |
| Dust removal                                | Centrifugal fan                                   |

## Cutting Parameters



|                                  |           | 1000W       | 1500W       | 2000W       | 3000W       | 6000W       | 12kW        | 20kW        | 30kW        |
|----------------------------------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|                                  | Thickness | speed m/min | speed m/min | speed m/min | speed m/min | speed m/min | speed m/min | speed m/min | speed m/min |
| "Carbon steel<br>(Q235A)<br>O2"  | 1         | 8.0-10      | 8.0-10      | 8.0-10      | 8.0-10      | 8-10        | 9-11        | 9-11        | 9-11        |
|                                  | 2         | 4.0-6.5     | 4.5-6.5     | 4.7-6.5     | 4.8-7.5     | 5-7.5       | 5-7.5       | 5-7.5       | 5-7.5       |
|                                  | 3         | 2.4-3.0     | 2.6-4.0     | 3.0-4.8     | 3.3-5.0     | 3.5-5       | 3.5-5.5     | 3.5-5.5     | 3.5-5.5     |
|                                  | 4         | 2.0-2.4     | 2.5-3.0     | 2.8-3.5     | 3.0-4.2     | 3.0-4.5     | 3.5-5       | 3.5-5       | 3.5-5       |
|                                  | 5         | 1.5-2.0     | 2.0-2.5     | 2.2-3.0     | 2.6-3.5     | 3.0-4.2     | 3.3-4.8     | 3.3-4.8     | 3.3-4.8     |
|                                  | 6         | 1.4-1.6     | 1.6-2.2     | 1.8-2.6     | 2.3-3.2     | 2.5-3.5     | 3.0-4.2     | 3.0-4.2     | 3.0-4.5     |
|                                  | 8         | 0.8-1.2     | 1.0-1.4     | 1.2-1.8     | 1.8-2.6     | 2.2-3.2     | 2.5-3.8     | 2.5-3.9     | 2.5-3.9     |
|                                  | 10        | 0.6-1.0     | 0.8-1.1     | 1.1-1.3     | 1.2-2.0     | 1.8-2.5     | 2.2-3.6     | 2.0-3.8     | 2.2-3.8     |
|                                  | 12        | 0.5-0.8     | 0.7-1.0     | 0.9-1.2     | 1.0-1.6     | 1.2-2.1     | 1.2-3.5     | 1.6-3.7     | 1.6-3.7     |
|                                  | 14        |             | 0.5-0.7     | 0.8-1.0     | 0.9-1.2     | 1.2-1.8     | 1.7-3.3     | 1.5-3.6     | 1.6-3.6     |
|                                  | 16        |             |             | 0.6-0.8     | 0.7-1.0     | 0.8-1.5     | 1.4-3.1     | 1.4-3.5     | 1.5-3.5     |
|                                  | 18        |             |             | 0.5-0.7     | 0.6-0.8     | 0.6-1.2     | 1.0-2.7     | 1.4-3.4     | 1.4-3.4     |
|                                  | 20        |             |             |             | 0.5-0.8     | 0.5-0.8     | 0.6-2.4     | 1.5-3.3     | 1.5-3.3     |
|                                  | 25        |             |             |             |             | 0.3-0.55    | 0.5-1.6     | 1.0-2.8     | 1.0-2.8     |
|                                  | 30        |             |             |             |             |             | 0.3-1.0     | 0.8-2.0     | 1.2-2.0     |
|                                  | 35        |             |             |             |             |             | 0.3-0.7     | 0.6-0.9     | 0.9-1.1     |
| 40                               |           |             |             |             |             | 0.2-0.4     | 0.5-1.0     | 0.8-1.0     |             |
| 45                               |           |             |             |             |             | 0.2-0.3     | 0.3-0.5     | 0.5-0.8     |             |
| 50                               |           |             |             |             |             |             | 0.2-0.5     | 0.4-0.6     |             |
| 60                               |           |             |             |             |             |             | 0.2-0.4     | 0.2-0.4     |             |
| "Stainless steel<br>(201)<br>N2" | 1         | 18-25       | 20-27       | 24-50       | 30-35       | 42-52       | 70-85       | 72-100      | 72-100      |
|                                  | 2         | 5-7.5       | 8.0-12      | 9.0-15      | 13-21       | 20-33       | 40-66       | 50-75       | 50-75       |
|                                  | 3         | 1.8-2.5     | 3.0-5.0     | 4.8-7.5     | 6.0-10      | 15-22       | 35-45       | 38-55       | 38-55       |
|                                  | 4         | 1.2-1.3     | 1.5-2.4     | 3.2-4.5     | 4.0-6.0     | 10-15       | 20-32       | 25-33       | 30-35       |
|                                  | 5         | 0.6-0.7     | 0.7-1.3     | 2.0-2.8     | 3.0-5.0     | 7.0-12      | 18-25       | 22-30       | 25-32       |
|                                  | 6         |             | 0.7-1.0     | 1.2-2.0     | 2.0-4.0     | 4.8-9.0     | 12-15       | 17-25       | 18-26       |
|                                  | 8         |             |             | 0.7-1.0     | 1.5-2.0     | 3.0-4.0     | 8-12        | 12-18       | 15-20       |
|                                  | 10        |             |             |             | 0.6-0.8     | 1.6-2.5     | 6.0-8.0     | 8.0-12.0    | 12-15       |
|                                  | 12        |             |             |             | 0.4-0.6     | 0.8-1.5     | 4.0-5.5     | 6.0-8.5     | 8-12        |
|                                  | 14        |             |             |             |             | 0.6-1.2     | 3.0-5.0     | 5.0-7.0     | 6-10.5      |
|                                  | 16        |             |             |             |             | 0.5-1.0     | 2.2-2.8     | 3.0-5.0     | 5-9         |
|                                  | 18        |             |             |             |             | 0.4-0.8     | 1.2-2.0     | 1.8-2.7     | 3-6.5       |
|                                  | 20        |             |             |             |             | 0.3-0.6     | 1.0-1.6     | 1.5-3.2     | 2-4.7       |
|                                  | 25        |             |             |             |             |             | 0.5-0.8     | 1.5-2.0     | 1.8-2.5     |
|                                  | 30        |             |             |             |             |             | 0.3-0.6     | 1.0-1.5     | 1.5-1.8     |
|                                  | 35        |             |             |             |             |             | 0.3-0.5     | 0.4-0.8     | 1.0-1.5     |
| 40                               |           |             |             |             |             | 0.3-0.5     | 0.3-0.6     | 0.6-1.3     |             |
| 45                               |           |             |             |             |             |             | 0.2-0.6     | 0.8-1.0     |             |
| 50                               |           |             |             |             |             |             | 0.2-0.5     | 0.25-0.5    |             |
| 60                               |           |             |             |             |             |             | 0.1-0.3     | 0.2-0.3     |             |
| 70                               |           |             |             |             |             |             |             | 0.17-0.3    |             |
| 80                               |           |             |             |             |             |             |             | 0.15-0.3    |             |
| "Aluminum<br>N2"                 | 1         | 6.0-10      | 10-20       | 20-30       | 25-38       | 42-55       | 60-85       | 70-100      |             |
|                                  | 2         | 2.8-3.6     | 5.0-7.0     | 10-15       | 10-18       | 20-40       | 38-50       | 40-70       |             |
|                                  | 3         |             | 2.0-4.0     | 5.0-7.0     | 6.5-8.0     | 15-25       | 30-40       | 35-60       |             |
|                                  | 4         |             | 1.0-1.5     | 3.5-5.0     | 3.5-5.0     | 9.5-12      | 20-30       | 30-43       |             |
|                                  | 5         |             |             | 1.8-2.5     | 2.5-3.5     | 5.0-8.0     | 15-25       | 20-32       |             |
|                                  | 6         |             |             | 1.0-1.5     | 1.5-2.5     | 3.8-5.0     | 10-15       | 15-26       |             |
|                                  | 8         |             |             |             | 0.7-1.0     | 2.0-2.5     | 7.0-12      | 10-18       |             |
|                                  | 10        |             |             |             | 0.4-0.7     | 1.0-1.5     | 4.5-8.0     | 6.0-10.0    |             |
|                                  | 12        |             |             |             |             | 0.8-1.3     | 4.0-5.0     | 4.0-6.0     |             |
|                                  | 14        |             |             |             |             | 0.9-1.2     | 1.8-2.7     | 2.2-3.2     |             |
|                                  | 16        |             |             |             |             | 0.5-0.8     | 1.5-2.5     | 2.0-3.0     |             |
|                                  | 18        |             |             |             |             | 0.5-0.7     | 1.0-1.8     | 1.5-2.0     |             |
|                                  | 20        |             |             |             |             | 0.5-0.7     | 0.9-1.5     | 1.3-1.8     |             |
|                                  | 25        |             |             |             |             |             | 0.6-0.9     | 0.6-1.2     |             |
|                                  | 30        |             |             |             |             |             | 0.3-0.8     | 0.5-1.0     |             |
|                                  | 35        |             |             |             |             |             | 0.3-0.6     | 0.3-0.8     |             |
| 40                               |           |             |             |             |             | 0.3-0.4     | 0.3-0.5     |             |             |
| "Brass<br>N2"                    | 1         | 6.0-10      | 8.0-13      | 12-18       | 20-35       | 35-45       | 55-65       | 65-75       |             |
|                                  | 2         | 2.8-3.6     | 3.0-4.5     | 6.0-8.5     | 6.0-10      | 20-30       | 38-42       | 40-60       |             |
|                                  | 3         |             | 1.5-2.5     | 2.5-4.0     | 4.0-6.0     | 12-18       | 18-30       | 25-40       |             |
|                                  | 4         |             | 1.0-1.6     | 2.0-3.0     | 3.0-5.0     | 8.0-12.0    | 15-20       | 20-35       |             |
|                                  | 5         |             |             | 0.9-1.2     | 1.5-2.0     | 6.0-8.0     | 10-15       | 18-25       |             |
|                                  | 6         |             |             |             | 1.0-1.8     | 3.0-6.5     | 6.0-8.0     | 10-18       |             |
|                                  | 8         |             |             |             |             | 1.6-2.2     | 5.0-7.0     | 8.0-10.0    |             |
|                                  | 10        |             |             |             |             | 0.8-1.2     | 4.5-6.0     | 5.0-9.0     |             |
|                                  | 12        |             |             |             |             | 0.3-0.5     | 2.4-4.0     | 2.8-4.2     |             |
|                                  | 14        |             |             |             |             |             | 0.8-1.5     | 1.5-5.0     |             |
|                                  | 16        |             |             |             |             |             | 0.6-1.2     | 1-2.4       |             |
|                                  | 18        |             |             |             |             |             | 0.4-0.6     | 0.8-2.2     |             |
|                                  | 20        |             |             |             |             |             |             | 0.4-2.0     |             |
| 25                               |           |             |             |             |             |             | 0.3-0.5     |             |             |



## Tube Cutting Parameters

|                 |                | 1000W       | 1500W       | 2000W       | 3000W       | 6000W       |
|-----------------|----------------|-------------|-------------|-------------|-------------|-------------|
|                 | Thickness (mm) | speed m/min | speed m/min | speed m/min | speed m/min | speed m/min |
| Carbon steel    | 1              | 12--15      | 17--19      | 16--20      | 18--21      | 18--21      |
|                 | 2              | 5--7        | 6--8        | 8--10       | 10--12      | 15-20       |
|                 | 3              | 2--3        | 2.5--3.5    | 3.0--4.8    | 3.5--5      | 3.8--5.5    |
|                 | 4              | 2--2.4      | 2.3--2.8    | 2.8--3.5    | 3--3.8      | 3.2--4.3    |
|                 | 5              | 1--1.6      | 1.8--2.4    | 2.5--3      | 2.6--3.2    | 3--4        |
|                 | 6              | 1.1--1.4    | 1.4--1.8    | 1.8--2.2    | 1.9--2.4    | 2.5--3.5    |
|                 | 8              | 0.8--1.1    | 1--1.4      | 1.4--1.8    | 1.6--2      | 2--3        |
|                 | 10             | 0.6--0.9    | 0.8--1.1    | 1.0--1.3    | 1.2--1.6    | 1.3--2.2    |
|                 | 12             | 0.6--0.7    | 0.6--0.9    | 0.8--1      | 0.9--1.3    | 1.2--1.7    |
|                 | 14             |             | 0.5--0.6    | 0.6--0.7    | 0.8--1      | 0.9--1.3    |
|                 | 16             |             |             |             | 0.6--0.9    | 0.6--1.1    |
|                 | 18             |             |             |             | 0.5--0.6    | 0.5--0.7    |
| 20              |                |             |             |             |             |             |
| Stainless steel | 1              | 12--16      | 15--20      | 20--24      | 23--28      | 23--28      |
|                 | 2              | 7--9        | 9--12       | 10--15      | 14--18      | 20--22      |
|                 | 3              | 2--2.5      | 2--3        | 3--4        | 4.2--5.4    | 8--10       |
|                 | 4              | 0.6--0.9    | 1.2--1.5    | 2--3        | 2.8--3.6    | 9--12       |
|                 | 5              |             | 0.6--0.9    | 1.2--1.6    | 1.8--2.4    | 6--8        |
|                 | 6              |             | 0.5--0.6    | 0.8--1.1    | 1--1.5      | 4--5.5      |
|                 | 8              |             |             | 0.5--0.6    | 0.8--1.2    | 2--3        |
|                 | 10             |             |             |             | 0.4--0.6    | 1--1.5      |
|                 | 12             |             |             |             |             | 0.5--1      |
|                 | 14             |             |             |             |             | 0.4--0.7    |
|                 | 16             |             |             |             |             | 0.2--0.4    |
|                 | 18             |             |             |             |             | 0.2--0.4    |
| 20              |                |             |             |             |             |             |


## Cutting Capacity

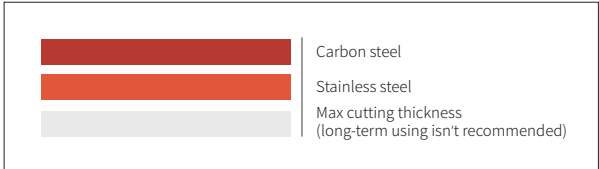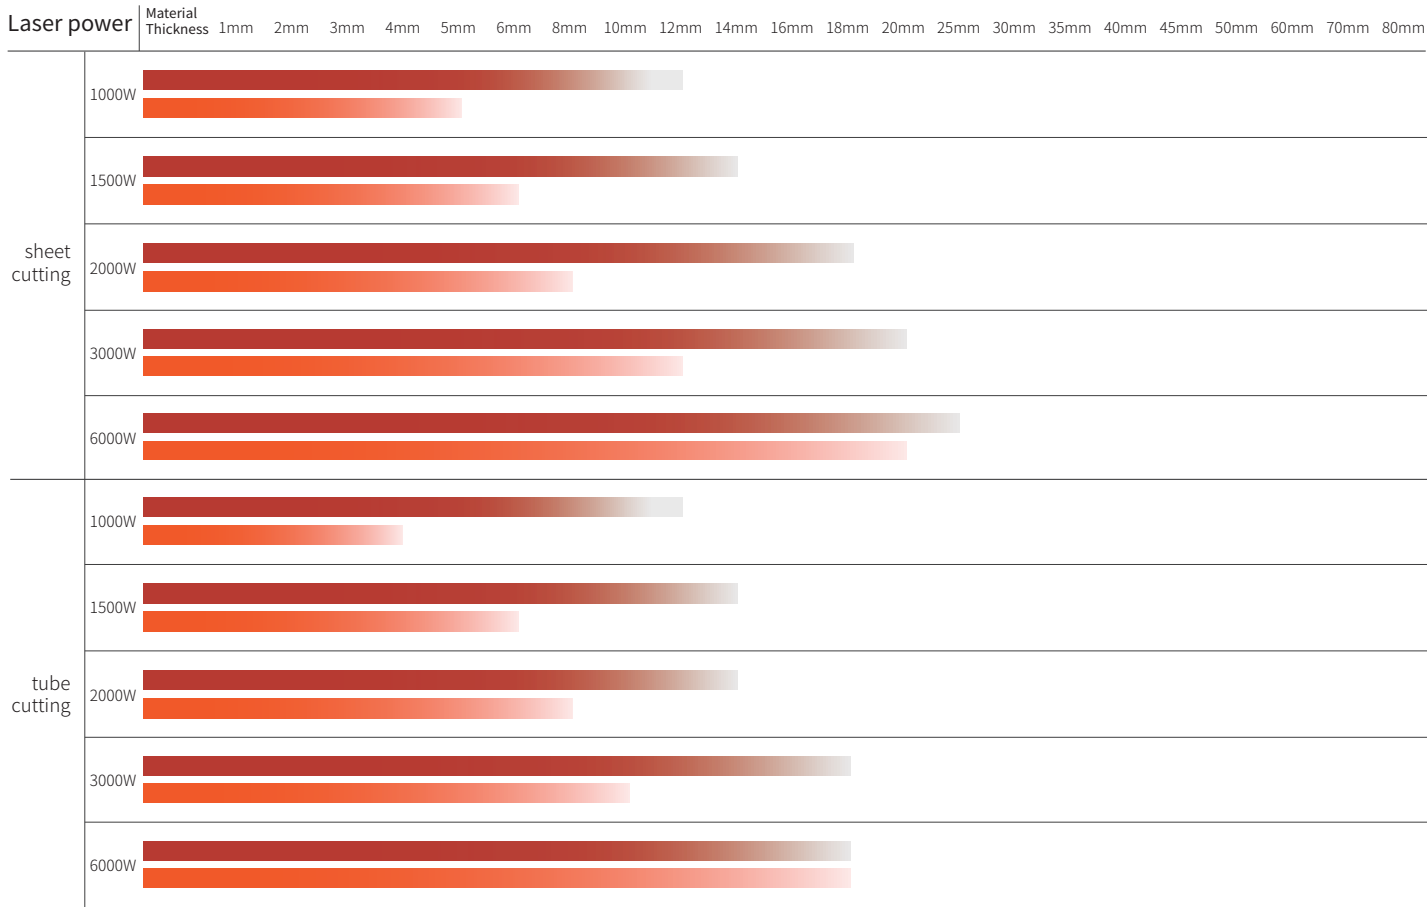

Above data is only for reference

Cutting Samples



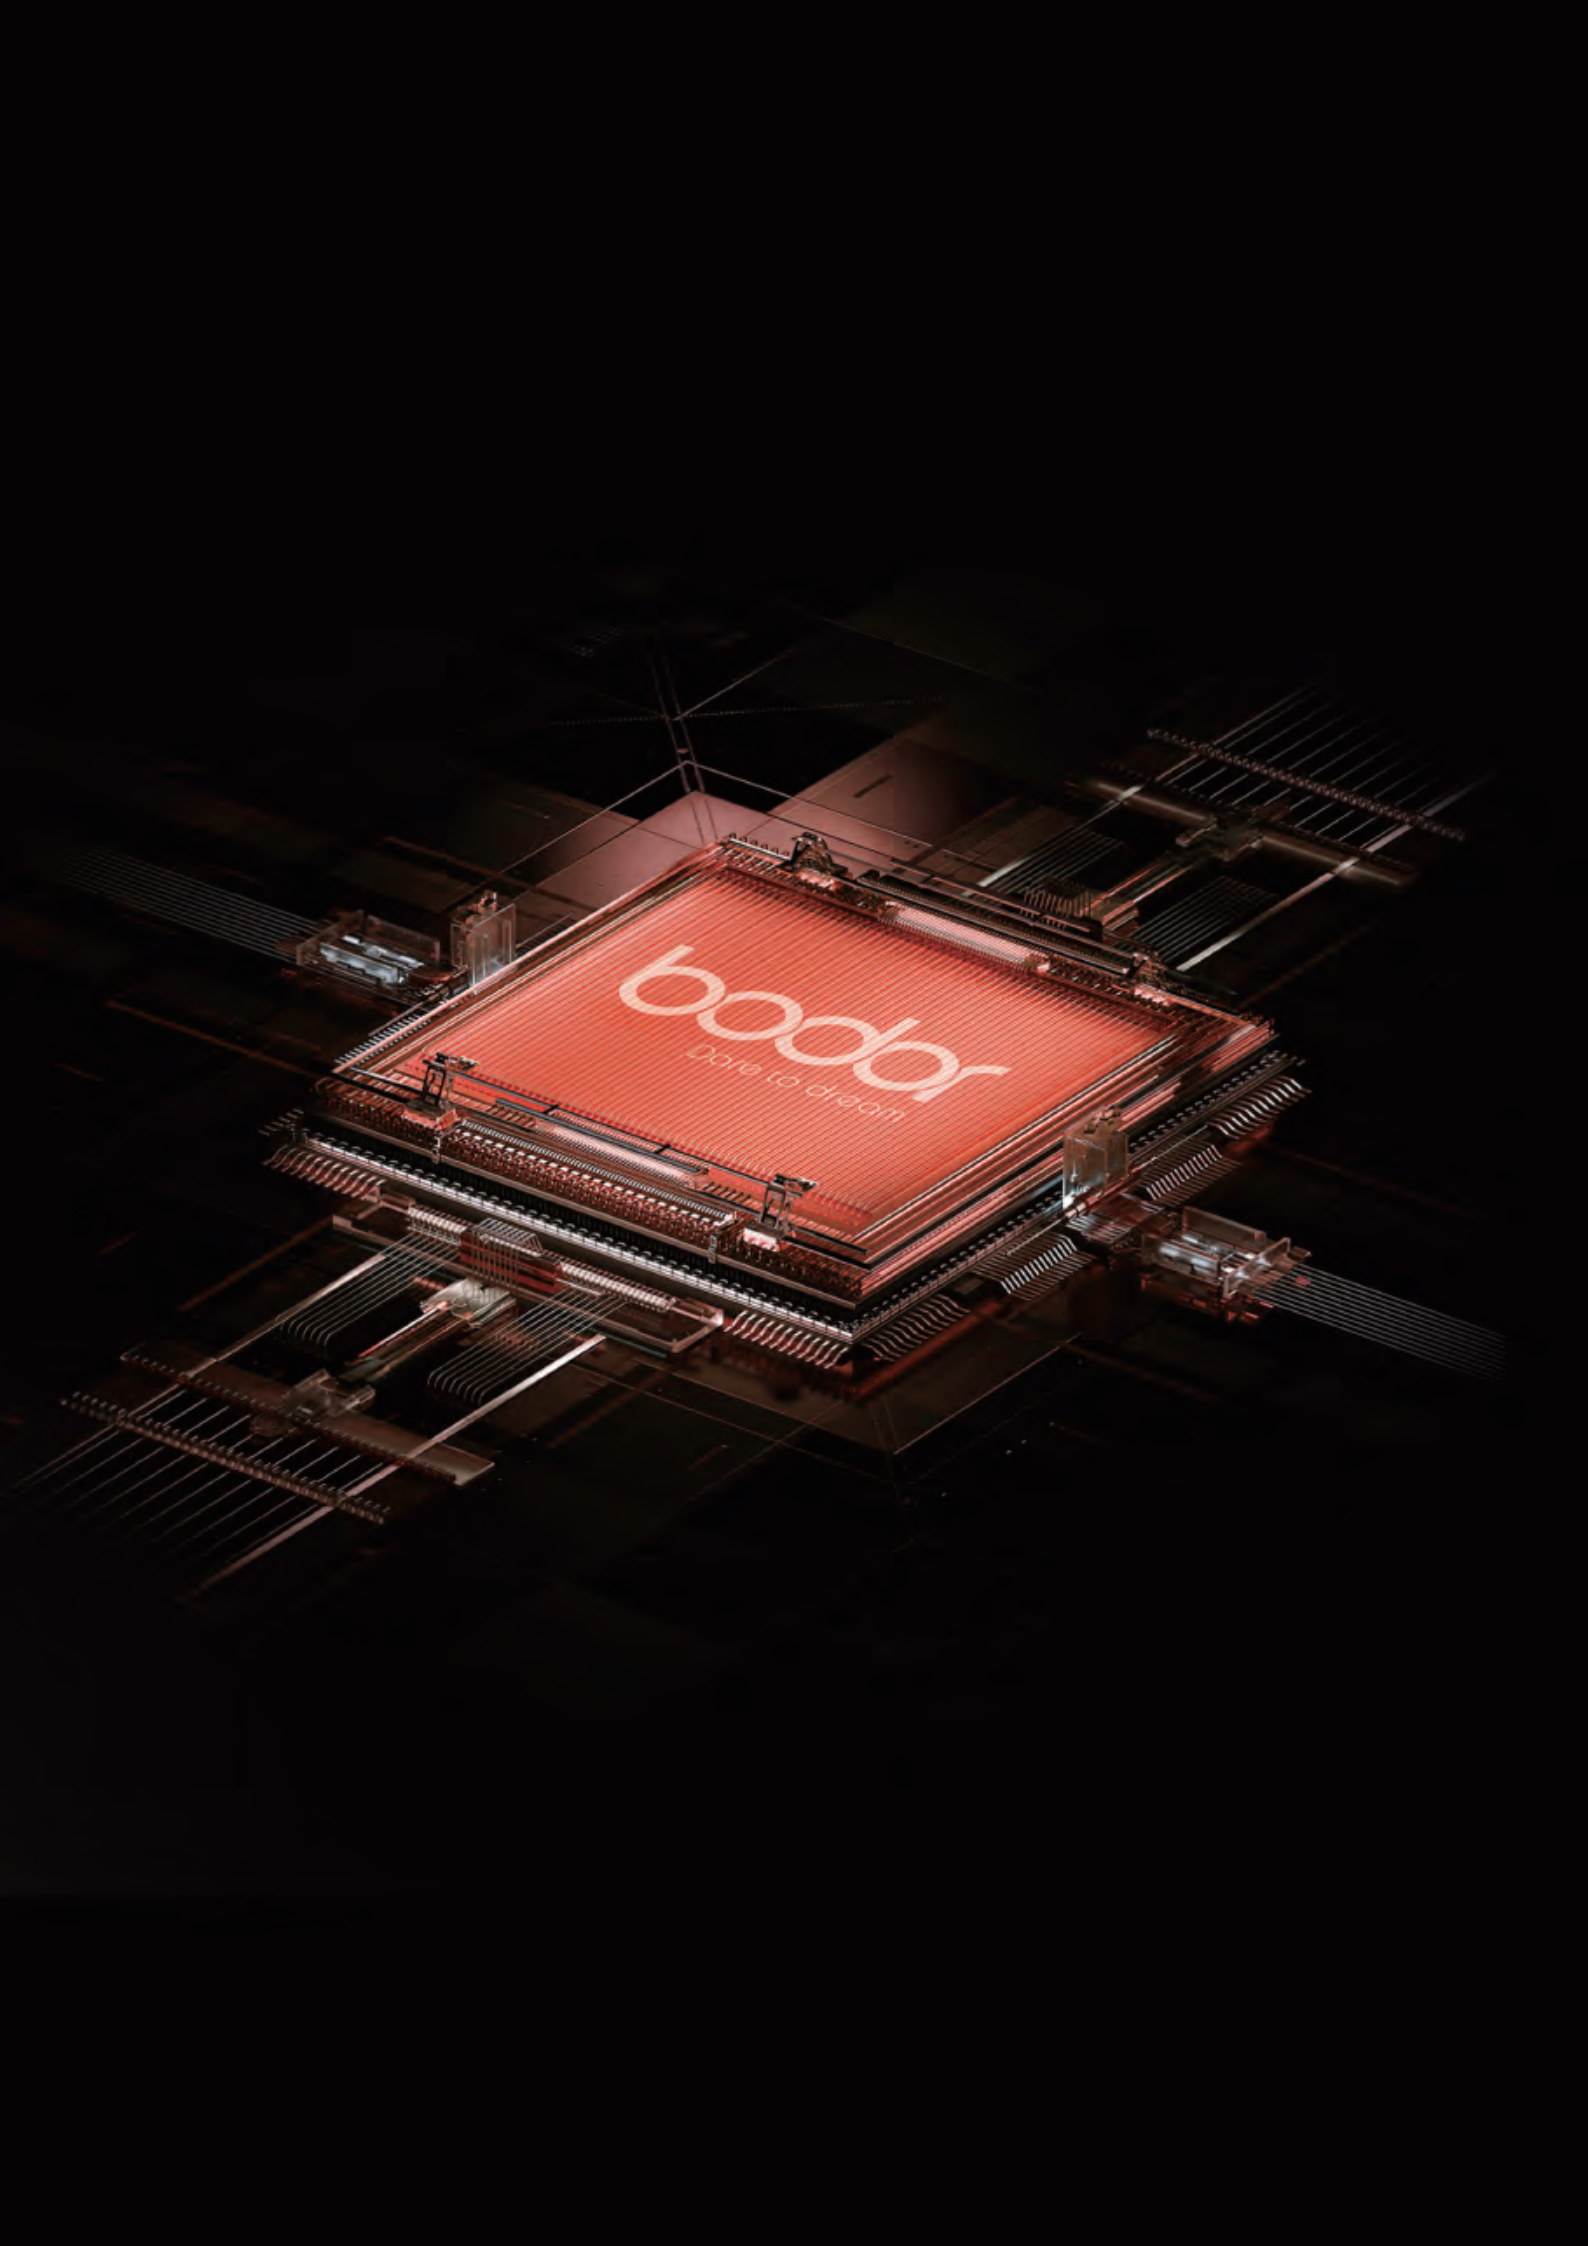

boddor  
Care to dream